

2018-07

ShinyKCode: an interactive application for ODE parameter inference using gradient matching

Wandy, J

<http://hdl.handle.net/10026.1/17958>

10.1093/bioinformatics/bty089

Bioinformatics

Oxford University Press (OUP)

All content in PEARL is protected by copyright law. Author manuscripts are made available in accordance with publisher policies. Please cite only the published version using the details provided on the item record or document. In the absence of an open licence (e.g. Creative Commons), permissions for further reuse of content should be sought from the publisher or author.

Systems biology

ShinyKCode: an interactive application for ODE parameter inference using gradient matching

Joe Wandy¹, Mu Niu², Diana Giurghita³, Rónán Daly¹, Simon Rogers⁴
and Dirk Husmeier^{3,*}

¹Glasgow Polyomics, University of Glasgow, Glasgow G61 1QH, UK, ²School of Computing, Electronics and Mathematics, University of Plymouth, Devon PL4 8AA, UK, ³School of Mathematics and Statistics and ⁴School of Computing Science, University of Glasgow, Glasgow G12 8QQ, UK

*To whom correspondence should be addressed.

Associate Editor: Jonathan Wren

Received on December 16, 2017; revised on February 12, 2018; editorial decision on February 13, 2018; accepted on February 26, 2018

Abstract

Motivation: Mathematical modelling based on ordinary differential equations (ODEs) is widely used to describe the dynamics of biological systems, particularly in systems and pathway biology. Often the kinetic parameters of these ODE systems are unknown and have to be inferred from the data. Approximate parameter inference methods based on gradient matching (which do not require performing computationally expensive numerical integration of the ODEs) have been getting popular in recent years, but many implementations are difficult to run without expert knowledge. Here, we introduce ShinyKCode, an interactive web application to perform fast parameter inference on ODEs using gradient matching.

Results: ShinyKCode can be used to infer ODE parameters on simulated and observed data using gradient matching. Users can easily load their own models in Systems Biology Markup Language format, and a set of pre-defined ODE benchmark models are provided in the application. Inferred parameters are visualized alongside diagnostic plots to assess convergence.

Availability and implementation: The R package for ShinyKCode can be installed through the Comprehensive R Archive Network (CRAN). Installation instructions, as well as tutorial videos and source code are available at <https://joewandy.github.io/shinyKCode>.

Contact: dirk.husmeier@glasgow.ac.uk

Supplementary information: [Supplementary data](#) are available at *Bioinformatics* online.

1 Introduction

Mathematical modelling using ordinary differential equations (ODEs) is commonly used in systems and pathway biology. In this modelling paradigm, ODE parameters are often unknown and the aim of inference is to estimate parameters of the dynamical system. Generally this involves numerically solving the system of ODEs at each step of the inference procedure and evaluating how well the inferred parameters match the data. However, since non-linear ODEs typically have no closed-form solution, solving ODEs requires computationally expensive numerical integration. In recent years, approximate methods based on gradient matching, which allow estimating the unknown ODE

parameters without the need for numerical integration, have been gaining popularity.

Gradient matching circumvents the numerical integration step by minimizing the difference in the derivatives of the interpolated data and the state variables predicted by the ODEs. The KCode package, available in the Comprehensive R Archive Network (CRAN), implements the gradient matching methods in Niu *et al.* (2016, 2017) to approximate ODE parameters. However, using the KCode package can be challenging for ordinary users as it requires expert knowledge in the R programming language. In this paper, we introduce an interactive application, *ShinyKCode*, built upon the KCode package, which provides a user-friendly interface to perform gradient matching and to visualize its results.

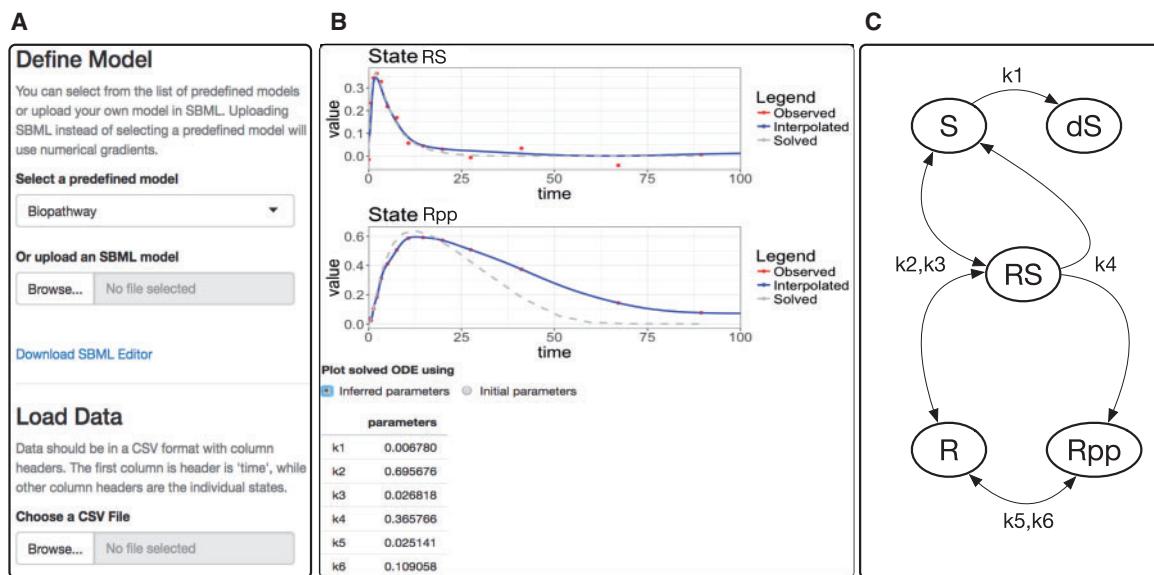


Fig. 1. (A) The *Model* panel of ShinyKCode shows how users can load custom models in SBML, as well as select from the three benchmark models. Synthetic data can be generated, while observed data can be loaded. (B) Example results of gradient-matching based inference for two system states (*RS*, *Rpp*) and all kinetic parameters of the Biopathway (BP) model (Vyshemirsky and Girolami, 2008). This model, available as one of the benchmark models in ShinyKCode, describes the interaction of five protein isoforms, *S*, *dS*, *R*, *RS*, *Rpp*, in a signal transduction pathway through a combination of mass action and Michaelis-Menten kinetics having six parameters (labeled k_{1-6}). We generate noisy data by numerically solving the ODEs for $k_1 = 0.07$, $k_2 = 0.6$, $k_3 = 0.05$, $k_4 = 0.3$, $k_5 = 0.017$, $k_6 = 0.3$, $t \in (0, 100)$ and initial conditions $S(0) = 1$, $dS(0) = 0$, $R(0) = 1$, $RS(0) = 0$ and $Rpp(0) = 0$. This produces 14 data points, which are used as data for gradient matching with warping. Inference takes approximately 2 min on our computer (2.6 GHz Intel Core i7). Plots of the observed data alongside the interpolated signals and the solutions of the ODEs for the inferred parameters are shown for each system state. A table of inferred parameters can also be downloaded. (C) The network diagram of the Biopathway model

2 Methods and implementation

ShinyKCode is implemented on top of Shiny, a framework in R to develop interactive applications. Parameter estimation in our application relies on the KCode package, which implements fast parameter inference using gradient matching (Niu *et al.*, 2016, 2017). The SBMLR package is used for parsing of user-defined models in the Systems Biology Markup Language (SBML), while plotting is done through the ggplot package.

Running the application will open the *Model* panel to select or upload dynamical models and provide data for inference (Fig. 1A). Three standard benchmark models (Lotka-Volterra, Fitz-Hugh-Nagumo and the Biopathway models) are available for illustration, and users can easily load their own SBML model into the application. To provide data, users can generate synthetic data or upload their own data. Data should be specified in a Comma-Separated Value (CSV) format having column headers, where the first column header is called 'time', and other column headers are labels for the individual system states. Each row in the CSV file contains the observed values of time and states (for more details, see Supplementary Section S1).

Once the model and data are specified, parameter estimation can be performed from the *Inference* tab. The framework of Reproducing Kernel Hilbert Spaces (RKHS) is used for fitting the gradient in KCode, and various inference options (including the choice of kernel function in RKHS and the initial values for optimization) can be adjusted from this tab. The Radial Basis Function and Multi-Layer Perceptron kernels are provided in ShinyKCode. Clicking the *Infer* button will run gradient matching, and a progress bar is shown. From the *Diagnostic* tab, users can also see plots for assessing convergence of the optimization algorithm used for inference. As an option, we also provide a parametric bootstrapping method to estimate parameter uncertainty (Supplementary Section S2). Methodological details are provided in Niu *et al.* (2016, 2017).

The KCode package also allows for ODE regularization and warped gradient matching functionalities described in Niu *et al.* (2016, 2017). These are advanced options that can lead to a significant improvement in parameter estimation accuracy. In ShinyKCode, both ODE regularization and warping are options that can be enabled. In Figure 1, we provide an example demonstrating how ShinyKCode can be used to perform parameter inference with warping in a simple protein signal transduction pathway, and on our website, we also provide example videos that demonstrate the benefits of enabling these advanced options.

3 Conclusion

In this application note, we have introduced ShinyKCode, an interactive application to perform parameter inference in biological dynamical systems using gradient matching. The application can easily be used by biologists who want to estimate parameters of mathematical models of biopathways based on ODEs from noisy data, and related applications.

Funding

JW, MN, SR and DH were supported by EPSRC (EP/L020319/1). RD was supported by Wellcome (105614/Z/14/Z).

Conflict of Interest: none declared.

References

- Niu, M. *et al.* (2016) Fast inference in nonlinear dynamical systems using gradient matching. *J. Machine Learning Res. Workshop Conf. Proc.*, **48**, 1699–1707.
- Niu, M. *et al.* (2017) Statistical inference in mechanistic models: time warping for improved gradient matching. *Comput. Stat.*, 1–33.
- Vyshemirsky, V. and Girolami, M. A. (2008) Bayesian ranking of biochemical system models. *Bioinformatics*, **24**, 833–839.